



Camshelving® Elements Series

Stationary Starter & Add-On Units 4 Solid or 4 Vented and Solid Shelves (3 Vented + 1 Solid)

HEIGHT	DEPTHS	LENGTHS
1	3	8
72"	18" 21" 24"	24" 48" 30" 54" 36" 60" 42" 72"

- **Starter Units include:**
2 factory assembled post kits, 8 stationary shelf traverses, stationary traverse dovetails and shelf plates.
- **Add-On Units include:**
1 factory assembled post kit, 8 stationary shelf traverses, stationary traverse dovetails and shelf plates.

All units ship complete in 1 box.



Features & Benefits

- Designed to easily support the performance demands of a busy foodservice operation with medium to heavy storage needs.
- Use in walk-in coolers, freezers, dry storage, warewashing areas, loading docks or front of the house. Withstands storage temperatures -36° to 190°F (-38° to 88°C). Impervious to moisture, chemicals, salt, food acids and humidity.
- Install solid shelf on bottom to prevent water/cleaning liquid from sloshing onto products. Install on top to protect product on lower shelves from cooler condensation.
- Posts and traverses are made of a revolutionary, extremely strong composite material. Stronger than common wire shelving and lighter in weight than Camshelving Premium Series. Traverse dovetails attach easily to secure shelf traverses.
- Smooth polypropylene shelf plates contain Camguard, an antimicrobial technology that inhibits the growth of mold, fungus and bacteria that may cause odors, stains and product degradation.
- Shelving Units interconnect in straight lines with shared posts. Uniquely engineered Post Connectors offer exceptional cross stabilization. No add-on clips or "S" hooks required.
- Use corner connectors to add shelves in corners or to install intermediate shelves between 2 starter units to maximize space.
- Posts and traverses wipe clean. Traverses and shelf plates remove easily for cleaning.
- Shelf traverses can be removed and adjusted at 4" (10,2 cm) increments.
- Sturdy reinforced nylon foot adjusts easily to level units.
- Requires some assembly with minimal parts. Use a rubber mallet only.
- Lifetime warranty against rust and corrosion (posts, traverses and shelf plates).
- Available in 1 color – Brushed Graphite (580).

Item No. _____

Quantity _____

AIA File / Spec No. _____

Job _____




Stationary Starter Unit



Stationary Add-On Unit

4 Shelf Unit Weight Bearing Chart

Single Unit Single Unit with Dunnage Stand Corner Unit with 2 Dunnage Stands

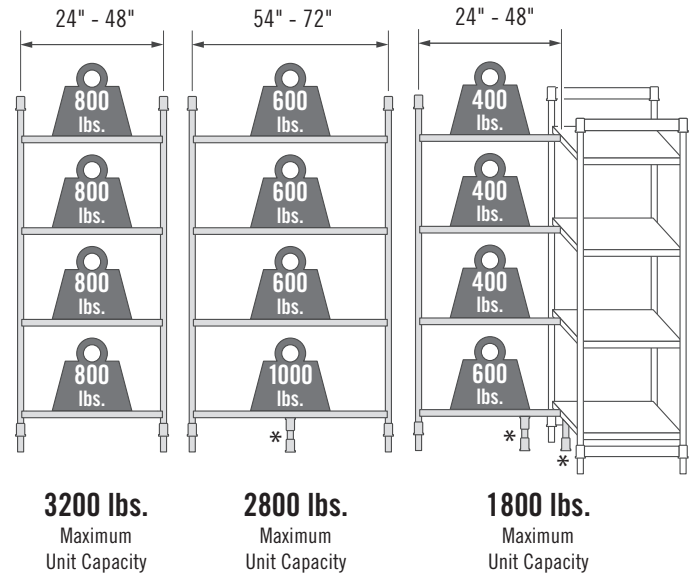

* Dunnage Stands add stability and increase weight bearing capacity on bottom shelf only. Add to any shelf length. Highly recommended for Starter Units 54" and longer, all Corner Units, U-Shape Units and units specified for heavier loads.

Approvals



Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Single Shelf Security Cage, Tray Slide Rack, and Shelf Divider Bars are not NSF listed.



Information and specifications are subject to change without notice. Please confirm at time of order.
 © Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, California 92647-2056, U.S.A.
 Telephone 714 848 1555 Toll Free 800 854 7631 Customer Service 800 833 3003 Email: customerservice@cambro.com
 Printed in USA. REV. 12/16

Camshelving® Elements Series

Stationary Starter & Add-On Units 4 Solid or 4 Vented and Solid Shelves (3 Vented + 1 Solid)


72"
HEIGHT

S4

4-Shelf Solid Units

Starter

Add-On



18"
DEPTH

LENGTH	CODE
24"	ESU182472S4
30"	ESU183072S4
36"	ESU183672S4
42"	ESU184272S4
48"	ESU184872S4
54"	ESU185472S4
60"	ESU186072S4
72"	ESU187272S4

LENGTH	CODE
22"	EA182472S4
28"	EA183072S4
34"	EA183672S4
40"	EA184272S4
46"	EA184872S4
52"	EA185472S4
58"	EA186072S4
70"	EA187272S4

21"
DEPTH

24"	ESU212472S4
30"	ESU213072S4
36"	ESU213672S4
42"	ESU214272S4
48"	ESU214872S4
54"	ESU215472S4
60"	ESU216072S4
72"	ESU217272S4

22"	EA212472S4
28"	EA213072S4
34"	EA213672S4
40"	EA214272S4
46"	EA214872S4
52"	EA215472S4
58"	EA216072S4
70"	EA217272S4

24"
DEPTH

24"	ESU242472S4
30"	ESU243072S4
36"	ESU243672S4
42"	ESU244272S4
48"	ESU244872S4
54"	ESU245472S4
60"	ESU246072S4
72"	ESU247272S4

22"	EA242472S4
28"	EA243072S4
34"	EA243672S4
40"	EA244272S4
46"	EA244872S4
52"	EA245472S4
58"	EA246072S4
70"	EA247272S4

Color: Brushed Graphite (580).

Optional Accessories

- Corner Connector Sets
- Bottom Shelf Dunnage Stands (Low or Tall)
- Shelf Identification Tags
- Wall Fastener
- Seismic Foot
- Shelf Divider Panel
- Shelf Divider Bars (Straight or Angled)
- Tray Sliding Rack
- Single Shelf Security Cage
- Shelf Traverses (Single or Double)
- Drying and Storage Cradles

Item No. _____

Quantity _____

AIA File / Spec No. _____



Job _____

VS4

4-Shelf Units (3 Vented + 1 Solid)

Starter

Add-On



LENGTH	CODE
24"	ESU182472VS4
30"	ESU183072VS4
36"	ESU183672VS4
42"	ESU184272VS4
48"	ESU184872VS4
54"	ESU185472VS4
60"	ESU186072VS4
72"	ESU187272VS4

LENGTH	CODE
22"	EA182472VS4
28"	EA183072VS4
34"	EA183672VS4
40"	EA184272VS4
46"	EA184872VS4
52"	EA185472VS4
58"	EA186072VS4
70"	EA187272VS4

24"	ESU212472VS4
30"	ESU213072VS4
36"	ESU213672VS4
42"	ESU214272VS4
48"	ESU214872VS4
54"	ESU215472VS4
60"	ESU216072VS4
72"	ESU217272VS4

22"	EA212472VS4
28"	EA213072VS4
34"	EA213672VS4
40"	EA214272VS4
46"	EA214872VS4
52"	EA215472VS4
58"	EA216072VS4
70"	EA217272VS4

24"	ESU242472VS4
30"	ESU243072VS4
36"	ESU243672VS4
42"	ESU244272VS4
48"	ESU244872VS4
54"	ESU245472VS4
60"	ESU246072VS4
72"	ESU247272VS4

22"	EA242472VS4
28"	EA243072VS4
34"	EA243672VS4
40"	EA244272VS4
46"	EA244872VS4
52"	EA245472VS4
58"	EA246072VS4
70"	EA247272VS4

Architect Specs

Posts and Traverses: Proprietary non-corrosive composite material.
 Post Connectors: Reinforced nylon.
 Shelf Plates: Reinforced polypropylene with Camguard® antimicrobial.
 Corner Connectors: Reinforced nylon.
 Adjustable Foot: Reinforced nylon.
 Traverse Dovetails: Reinforced nylon.
 Post Connector Wedges: Reinforced polypropylene.

Approvals



Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Single Shelf Security Cage, Tray Slide Rack, and Shelf Divider Bars are not NSF listed.