



Camshelving® Elements Series

Mobile Starter Units 4 or 5 Vented Shelves

HEIGHTS	DEPTHS	LENGTHS	
2	3	5	
70"	18"	36"	54"
78"	21"	42"	60"
	24"	48"	

Mobile Starter Units include:

2 factory assembled mobile post kits, 8 or 10 mobile shelf traverses, mobile traverse dovetails, shelf plates and 4 premium swivel casters with total locking brake.

All units ship complete in 1 box.



Features & Benefits

- Use in walk-in coolers, freezers, dry storage, warewashing areas, loading docks or front of the house. Withstands storage temperatures -36° to 190°F (-38° to 88°C). Impervious to moisture, chemicals, salt, food acids and humidity.
- Posts and traverses are made of a revolutionary, extremely strong composite material with a smooth, easy to clean surface. Stronger than common wire shelving and lighter in weight than Camshelving Premium Series. Traverse dovetails are separate from the posts and attach easily to secure the shelf traverses.
- Premium caster is made of highly durable, non-corrosive plastic with a 5" (12,7 cm) swivel, non-marking thermoplastic rubber wheel. Total locking brake locks both swivel motion and the wheel.
- Optional donut bumper offers added protection during transport and when maneuvering mobile units into place against walls or alongside other units for storage.
- Smooth polypropylene shelf plates contain Camguard, an antimicrobial technology that inhibits the growth of mold, fungus and bacteria that may cause odors, stains and product degradation.
- Posts and traverses wipe clean. Traverses and shelf plates remove easily for cleaning.
- Shelf traverses can be removed and adjusted at 4" (10,2 cm) increments.
- Requires some assembly with minimal parts. Use a rubber mallet only.
- Lifetime warranty against rust and corrosion (posts, traverses and shelf plates).
- Available in 1 color – Brushed Graphite (580).

Item No. _____

Quantity _____

AIA File / Spec No. _____

Job _____




Mobile Starter Unit with 4 Vented Shelves



Mobile Starter Unit with 5 Vented Shelves

4 Shelf Unit Weight Bearing Chart

Mobile Unit

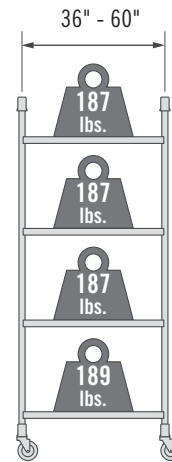

750 lbs.
Maximum Unit Capacity

Approvals



Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Single Shelf Security Cage, Tray Slide Rack, and Shelf Divider Bars are not NSF listed.



Information and specifications are subject to change without notice. Please confirm at time of order.

© Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, California 92647-2056, U.S.A.


Telephone 714 848 1555 Toll Free 800 854 7631 Customer Service 800 833 3003 Email: customerservice@cambro.com

Printed in USA. REV. 12/16

Camshelving® Elements Series

Mobile Starter Units 4 or 5 Vented Shelves

70"
HEIGHT



18"
DEPTH

21"
DEPTH

24"
DEPTH

78"
HEIGHT

18"
DEPTH

21"
DEPTH

24"
DEPTH

V4 4-Shelf Vented Mobile Units

CODE	DIMENSIONS D x L x H
EMU183670V4	18" x 36" x 70"
EMU184270V4	18" x 42" x 70"
EMU184870V4	18" x 48" x 70"
EMU185470V4	18" x 54" x 70"
EMU186070V4	18" x 60" x 70"

EMU213670V4	21" x 36" x 70"
EMU214270V4	21" x 42" x 70"
EMU214870V4	21" x 48" x 70"
EMU215470V4	21" x 54" x 70"
EMU216070V4	21" x 60" x 70"

EMU243670V4	24" x 36" x 70"
EMU244270V4	24" x 42" x 70"
EMU244870V4	24" x 48" x 70"
EMU245470V4	24" x 54" x 70"
EMU246070V4	24" x 60" x 70"

CODE	DIMENSIONS D x L x H
EMU183678V4	18" x 36" x 78"
EMU184278V4	18" x 42" x 78"
EMU184878V4	18" x 48" x 78"
EMU185478V4	18" x 54" x 78"
EMU186078V4	18" x 60" x 78"

EMU213678V4	21" x 36" x 78"
EMU214278V4	21" x 42" x 78"
EMU214878V4	21" x 48" x 78"
EMU215478V4	21" x 54" x 78"
EMU216078V4	21" x 60" x 78"

EMU243678V4	24" x 36" x 78"
EMU244278V4	24" x 42" x 78"
EMU244878V4	24" x 48" x 78"
EMU245478V4	24" x 54" x 78"
EMU246078V4	24" x 60" x 78"

Color: Brushed Graphite (580).

Architect Specs

Posts and Traverses: Proprietary non-corrosive composite material.
 Post Connectors: Reinforced nylon.
 Shelf Plates: Reinforced polypropylene with Camguard® antimicrobial.
 Caster: Non-corrosive plastic body and brake with non-marking thermoplastic rubber wheel.
 Traverse Dovetails: Reinforced nylon.
 Post Connector Wedges: Reinforced polypropylene.

CAMBRO
TRUSTED FOR GENERATIONS™
www.cambro.com


Information and specifications are subject to change without notice. Please confirm at time of order.
 © Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, California 92647-2056, U.S.A.
 Telephone 714 848 1555 Toll Free 800 854 7631 Customer Service 800 833 3003 Email: customerservice@cambro.com
 Printed in USA. REV. 12/16

Item No. _____

Quantity _____

AIA File / Spec No. _____

Job _____



18"
DEPTH

21"
DEPTH

24"
DEPTH

18"
DEPTH

21"
DEPTH

24"
DEPTH

V5 5-Shelf Vented Mobile Units

CODE	DIMENSIONS D x L x H
EMU183670V5	18" x 36" x 70"
EMU184270V5	18" x 42" x 70"
EMU184870V5	18" x 48" x 70"
EMU185470V5	18" x 54" x 70"
EMU186070V5	18" x 60" x 70"

EMU213670V5	21" x 36" x 70"
EMU214270V5	21" x 42" x 70"
EMU214870V5	21" x 48" x 70"
EMU215470V5	21" x 54" x 70"
EMU216070V5	21" x 60" x 70"

EMU243670V5	24" x 36" x 70"
EMU244270V5	24" x 42" x 70"
EMU244870V5	24" x 48" x 70"
EMU245470V5	24" x 54" x 70"
EMU246070V5	24" x 60" x 70"

CODE	DIMENSIONS D x L x H
EMU183678V5	18" x 36" x 78"
EMU184278V5	18" x 42" x 78"
EMU184878V5	18" x 48" x 78"
EMU185478V5	18" x 54" x 78"
EMU186078V5	18" x 60" x 78"

EMU213678V5	21" x 36" x 78"
EMU214278V5	21" x 42" x 78"
EMU214878V5	21" x 48" x 78"
EMU215478V5	21" x 54" x 78"
EMU216078V5	21" x 60" x 78"

EMU243678V5	24" x 36" x 78"
EMU244278V5	24" x 42" x 78"
EMU244878V5	24" x 48" x 78"
EMU245478V5	24" x 54" x 78"
EMU246078V5	24" x 60" x 78"

Optional Accessories

- Shelf Identification Tags
- Shelf Divider Panel
- Shelf Divider Bars (Straight or Angled)
- Single Shelf Security Cage
- Shelf Traverses (Single or Double)
- Drying and Storage Cradles

Approvals



Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Single Shelf Security Cage, Tray Slide Rack, and Shelf Divider Bars are not NSF listed.

ES8

D101609