



Camshelving® Premium Series

High Density Storage Floor Track System High Density Mobile Starter Units 4 Vented or Solid Shelves

| HEIGHTS | DEPTHS | LENGTHS |
|---------|--------|----------------|
| 2 | 2 | 5 |
| 67" | 21" | 36" 54" |
| 75" | 24" | 42" 60" 48" |

- **High Density Mobile Starter Units include:**
2 factory assembled mobile post kits, 8 shelf traverses, shelf plates, 4 high density casters, and 4 high density donut bumpers. Units ship complete in 1 box.
- **High Density Full Track Kits include:**
Aluminum raised tracks, steel joiners, stationary unit end plates and leveling feet, pan head screws, and star washers.
- **High Density Track Extension Kits include:**
Aluminum raised tracks, steel joiners, pan head screws and star washers.



Features & Benefits

- Increase storage capacity by adding storage aisles in open floor space. System composed of stationary starter units anchored to raised floor track system at each end with high density mobile units installed on tracks.
- Use in walk-in coolers, freezers, dry storage areas, loading docks or front of the house. Withstands storage temperatures -36° to 190°F (-38° to 88°C). Impervious to moisture, chemicals, salt, food acids and humidity.
- Posts and traverses have a steel core and smooth polypropylene exterior for superior strength and durability. Traverse dovetails are molded into posts. NOTE: Mobile units require Mobile Posts for assembly.
- Uniquely engineered Post Connectors offer exceptional cross stabilization. Weight bearing is uncompromised.
- Premium high density grooved caster rolls securely and easily on raised track.
- High density donut bumpers offer added protection when maneuvering high density mobile units back and forth on the track.
- Grooved track rails connect to bottom of stationary units with easy to install stainless steel hardware. No bolts, glue or drilling required.
- Aluminum tracks and stainless steel hardware are rust resistant. Track provides smooth and level surface for mobile units and is designed for easy cleaning.
- Smooth polypropylene shelf plates contain Camguard, an antimicrobial technology that inhibits the growth of mold, fungus and bacteria that may cause odors, stains and product degradation.
- Posts and traverses wipe clean. Traverses and shelf plates remove easily for cleaning.


Item No. _____
 Quantity _____
 AIA File / Spec No. _____
 Job _____



Stationary Unit High Density Mobile Units Stationary Unit
High Density Storage Floor Track System

4 Shelf Unit Weight Bearing Chart

High Density Mobile Unit

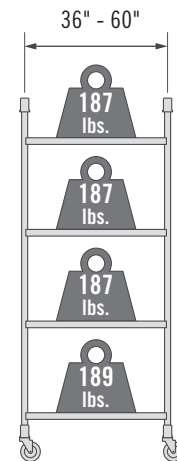

750 lbs.
Maximum
Unit Capacity

- Shelf traverses can be removed and adjusted at 4" (10,2 cm) increments.
- Recommend installing a stationary unit every 15' of track to stabilize system.
- Requires some assembly with minimal parts. Use a rubber mallet only.
- Lifetime warranty against rust and corrosion (posts, traverses and shelf plates).
- Available in 1 color – Speckled Gray (480).

Approvals



Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Security Cages, Tray Slide Rack, Shelf Rails, Divider Bars, High Density Track and Extension Kits are not NSF Listed.



Camshelving® Premium Series

High Density Storage Floor Track System High Density Mobile Starter Units 4 Vented or Solid Shelves

Item No. _____

Quantity _____

AIA File / Spec No. _____

Job _____

V4

4-Shelf Vented High Density Mobile Units

67"
HEIGHT

21"
DEPTH

| CODE | DIMENSIONS D x L x H |
|--------------|-------------------------|
| CPHU213667V4 | 21" x 36" x 67" |
| CPHU214267V4 | 21" x 42" x 67" |
| CPHU214867V4 | 21" x 48" x 67" |
| CPHU215467V4 | 21" x 54" x 67" |
| CPHU216067V4 | 21" x 60" x 67" |

24"
DEPTH

| | |
|--------------|-----------------|
| CPHU243667V4 | 24" x 36" x 67" |
| CPHU244267V4 | 24" x 42" x 67" |
| CPHU244867V4 | 24" x 48" x 67" |
| CPHU245467V4 | 24" x 54" x 67" |
| CPHU246067V4 | 24" x 60" x 67" |

75"
HEIGHT

21"
DEPTH

| CODE | DIMENSIONS D x L x H |
|--------------|-------------------------|
| CPHU213675V4 | 21" x 36" x 75" |
| CPHU214275V4 | 21" x 42" x 75" |
| CPHU214875V4 | 21" x 48" x 75" |
| CPHU215475V4 | 21" x 54" x 75" |
| CPHU216075V4 | 21" x 60" x 75" |

24"
DEPTH

| | |
|--------------|-----------------|
| CPHU243675V4 | 24" x 36" x 75" |
| CPHU244275V4 | 24" x 42" x 75" |
| CPHU244875V4 | 24" x 48" x 75" |
| CPHU245475V4 | 24" x 54" x 75" |
| CPHU246075V4 | 24" x 60" x 75" |

Color: Speckled Gray (480).

S4

4-Shelf Solid High Density Mobile Units

21"
DEPTH

| CODE | DIMENSIONS D x L x H |
|--------------|-------------------------|
| CPHU213667S4 | 21" x 36" x 67" |
| CPHU214267S4 | 21" x 42" x 67" |
| CPHU214867S4 | 21" x 48" x 67" |
| CPHU215467S4 | 21" x 54" x 67" |
| CPHU216067S4 | 21" x 60" x 67" |

24"
DEPTH

| | |
|--------------|-----------------|
| CPHU243667S4 | 24" x 36" x 67" |
| CPHU244267S4 | 24" x 42" x 67" |
| CPHU244867S4 | 24" x 48" x 67" |
| CPHU245467S4 | 24" x 54" x 67" |
| CPHU246067S4 | 24" x 60" x 67" |

21"
DEPTH

| CODE | DIMENSIONS D x L x H |
|--------------|-------------------------|
| CPHU213675S4 | 21" x 36" x 75" |
| CPHU214275S4 | 21" x 42" x 75" |
| CPHU214875S4 | 21" x 48" x 75" |
| CPHU215475S4 | 21" x 54" x 75" |
| CPHU216075S4 | 21" x 60" x 75" |

24"
DEPTH

| | |
|--------------|-----------------|
| CPHU243675S4 | 24" x 36" x 75" |
| CPHU244275S4 | 24" x 42" x 75" |
| CPHU244875S4 | 24" x 48" x 75" |
| CPHU245475S4 | 24" x 54" x 75" |
| CPHU246075S4 | 24" x 60" x 75" |

Optional Accessories

- Shelf Identification Tags
- Shelf Divider Panel
- Shelf Divider Bars (Straight or Angled)
- Shelf Rails (Single or Double)
- Single Shelf Security Cage
- Shelf Traverses (Single or Double)
- Drying and Storage Cradles

Architect Specs

Posts and Traverses: Internal steel core, reinforced polypropylene exterior.
Post Connectors: Reinforced polypropylene.
Shelf Plates: Reinforced polypropylene with Camguard™ antimicrobial.
Raised Grooved Rail: Aluminum.
Track Hardware: Stainless Steel.
High Density Caster: Polyolefin resin with zinc plated post.

Full Track and Extension Kits

| CODE | DESCRIPTION |
|-----------------------------|---------------------------------|
| Full Track Kits | |
| CSMHDTK10 | 10' Track for 3 Mobile Units* |
| CSMHDTK12 | 12' Track for 4 Mobile Units* |
| CSMHDTK145 | 14.5' Track for 5 Mobile Units* |
| Track Extension Kits | |
| CSMHDTKE4 | 4.5' Track Extension |
| CSMHDTKE5 | 5' Track Extension |
| CSMHDTKE6 | 6' Track Extension |

Case Pack: 1 Color: Silver (000).

*Based on 24" deep mobile units.

Approvals



Post Connectors, Corner Connectors, Seismic Foot, Wall Fastener, Identification Tags, Security Cages, Tray Slide Rack, Shelf Rails, Divider Bars, High Density Track and Extension Kits are not NSF Listed.

CAMBRO
TRUSTED FOR GENERATIONS™
www.cambro.com

Information and specifications are subject to change without notice. Please confirm at time of order.
© Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, California 92647-2056, U.S.A.
Telephone 714 848 1555 Toll Free 800 854 7631 Customer Service 800 833 3003 Email: customerservice@cambro.com
Printed in USA. REV. 09/16

PS11

D081607